



600V PVC Wire

UL 10542

Product Description

 Rated voltage
600V

 Rated temperature
60°C / 80°C / 90°C / 105°C

 Fire Performances
Horizontal flame

 AWG
34AWG-4/0AWG


 ²⁹CU Conductor
Solid / Stranded

 Insulation
UL Labeled

 Covering
PVC

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 10542 105°C 600V FT2 □□AWG
3A AWM IA 105°C 600V □□AWG FT2 3A LF

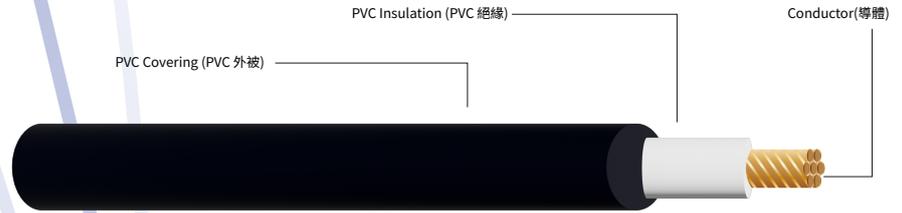

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Covering (mm) 外被厚度(mm)	
16	26/0.254	0.40	0.50	3.30±0.15
18	34/0.18	0.40	0.50	3.01±0.15
20	21/0.18	0.40	0.50	2.75±0.15
22	17/0.16	0.40	0.50	2.56±0.15
24	11/0.16	0.40	0.50	2.41±0.15
26	7/0.16	0.40	0.50	2.29±0.15

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners