



600V PVC Wire

UL 1316

Product Description

 Rated voltage
600V

 Rated temperature
90°C / 105°C

 Fire Performances
Horizontal flame

 AWG
26AWG-12AWG


 Conductor
Solid / Stranded

 Insulation
PVC

 Covering
Nylon

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1316 90°C 600V FT2 □□AWG
3A AWM IA 90°C 600V □□AWG FT2 3A LF

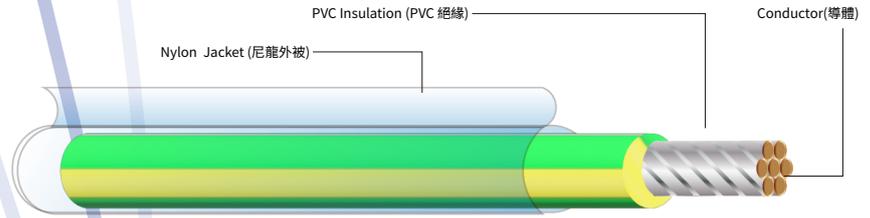

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Covering (mm) 外被厚度(mm)	
12	65/0.254	0.44	0.16	3.57 ±0.1
14	41/0.254	0.44	0.16	3.08 ±0.1
16	26/0.254	0.44	0.16	2.70 ±0.1
18	34/0.18	0.44	0.16	2.42 ±0.1
20	21/0.18	0.44	0.16	2.16 ±0.1
22	17/0.16	0.44	0.16	1.97 ±0.1
24	11/0.16	0.44	0.16	1.82 ±0.1
26	7/0.16	0.44	0.16	1.69±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners