



UL 1317

Product Description

 Rated voltage
600V

 Rated temperature
90°C / 105°C

 Fire Performances
Horizontal flame

 AWG
10AWG

 Conductor
Solid / Stranded round


 Insulation
PVC

 Assembly
Similar to Type THHN

 Covering
Nylon

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1317 90°C 600V FT2 □□AWG
3A AWM IA 90°C 600V □□AWG FT2 3A LF

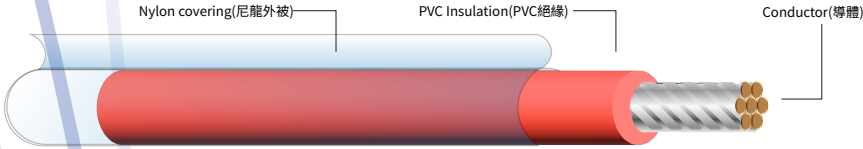

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Jacket (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
10	105/0.254	0.57	0.16	4.47±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners