



600V PVC Wire

UL 1346
Product Description

Rated voltage
600V

Rated temperature
105°C

Fire Performances
Horizontal flame


AWG
8AWG-2AWG

Conductor
Solid / Stranded

Insulation
PVC

Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1346 105°C 600V FT2 □□AWG
3A AWM IA 105°C 600V □□AWG FT2 3A LF

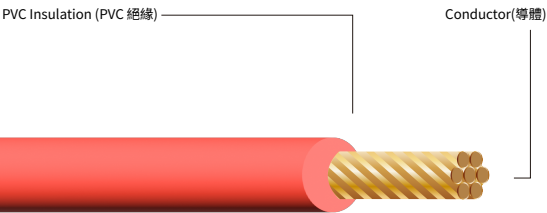

Conductor			Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Insulation Thickness (mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
2	665/0.254	8.74	1.58	10.73±0.15
4	420/0.254	6.94	1.58	9.18±0.15
6	259/0.254	5.46	1.58	7.89±0.15
8	161/0.254	3.72	1.58	6.88±0.15

AWM UL 758
3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners