



## UL 21064

## Product Description



Rated voltage

30V



Rated temperature

80°C



Fire Performances

Horizontal flame



AWG

40AWG-20AWG



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

2-4 parallel, or 2 or more insulated  
singles twisted together.

Shield

Optional



Jacket

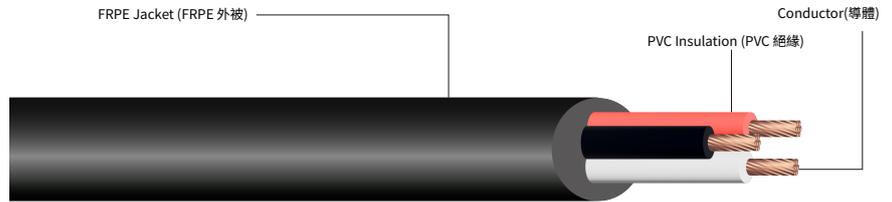
FRPE



Bend Radius

10X

## Marking Example:

E209277 cUL AWM STYLE 20626 90°C 30V FT2 □□AWG  
3A AWM IA 90°C 30V □□AWG FT2 3A LF

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket&Shield of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	2	1.85	0.19	3.40±0.1
20	21/0.18	2	1.59	0.19	3.00±0.1
22	17/0.16	2	1.40	0.19	2.66±0.1
24	11/0.16	2	1.25	0.19	2.45±0.1
26	7/0.16	2	1.13	0.19	2.30±0.1
28	7/0.127	2	1.03	0.19	2.10±0.1
30	7/0.10	2	0.94	0.19	1.95±0.1
	7/0.10	3	0.94	0.19	2.50±0.1

## AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

