



UL 21080

Product Description

 **Rated voltage**
300V

 **Rated temperature**
75°C

 **Fire Performances**
Cable flame

 **AWG**
30AWG-4/0AWG

 **Conductor**
Solid / Stranded


 **Insulation**
UL Labeled

 **Assembly**
**2 or more insulated singles
twisted together**

 **Covering / Shield**
Optional / FRPE
Optional

 **Jacket**
FRPE

 **Bend Radius**
10X

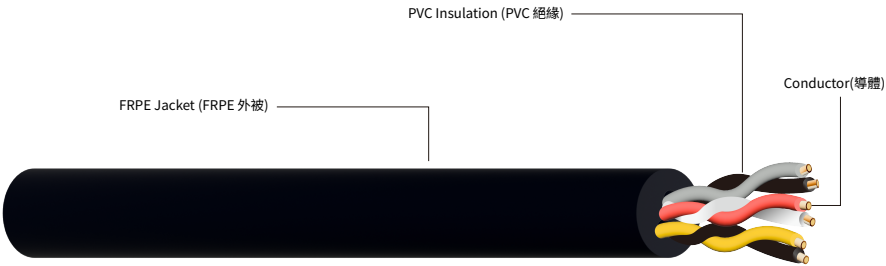

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket&Shield of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	2	1.85	0.15	4.00±0.1
20	21/0.18	2	1.59	0.15	3.48±0.1
22	17/0.16	2	1.40	0.15	3.10±0.1
24	11/0.16	2	1.25	0.15	2.80±0.1
26	7/0.16	2	1.13	0.15	2.56±0.1
28	7/0.127	2	1.03	0.15	2.36±0.1
30	7/0.10	2	0.94	0.15	2.19±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 21080 75°C 300V VW-1 □□AWG
3A AWM IA 75°C 300V □□AWG VW-1 3A LF

