



UL 21089

Product Description

 Rated voltage
600V

 Rated temperature
75°C

 Fire Performances
Cable flame

 AWG
30AWG-4/0AWG

 **CU** Conductor
Solid / Stranded

 Insulation
UL Labeled


 Assembly
2 or more insulated singles twisted together.

 Shield / Covering
Optional
Optional / FRPE

 Jacket
FRPE

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 21089 75°C 600V VW-1 □□AWG
3A AWM IA 75°C 600 V □□AWG VW-1 3A LF

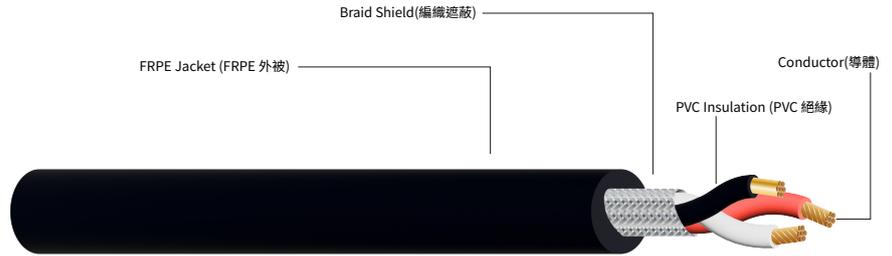

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	2	1.84	0.76	5.30±0.1
	34/0.18	3	1.84	0.76	5.50±0.1
	34/0.18	4	1.84	0.76	6.00±0.1
20	21/0.18	2	1.58	0.76	4.90±0.1
	21/0.18	3	1.58	0.76	5.00±0.1
	21/0.18	4	1.58	0.76	5.40±0.1
22	17/0.16	2	1.40	0.76	4.40±0.1
	17/0.16	3	1.40	0.76	4.60±0.1
	17/0.16	4	1.40	0.76	5.00±0.1
24	11/0.16	2	1.25	0.76	4.10±0.1
	11/0.16	3	1.25	0.76	4.30±0.1
	11/0.16	4	1.25	0.76	4.60±0.1
26	7/0.16	2	1.13	0.76	3.90±0.1
	7/0.16	3	1.13	0.76	4.00±0.1
	7/0.16	4	0.13	0.76	4.30±0.1
28	7/0.127	2	1.03	0.76	3.70±0.1
	7/0.127	3	1.03	0.76	3.90±0.1
	7/0.127	4	1.03	0.76	4.00±0.1
30	7/0.10	2	0.94	0.76	3.40±0.1
	7/0.10	3	0.94	0.76	3.70±0.1
	7/0.10	4	0.94	0.76	3.90±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners



<https://www.3awire.com/>

All Rights Reserved.

The information provided by 3A PLUS is intended for general informational purposes only and should not be construed as professional advice. While we strive for accuracy and completeness, we make no guarantees regarding the reliability, suitability, or availability of the information presented. Any reliance you place on such information is strictly at your own risk. We reserve the right to modify our products, services, and policies at any time without prior notice. For specific inquiries or concerns, please contact us directly. Thank you for choosing 3A PLUS Wire & Cable.