



UL 21115

Product Description

Rated voltage

1000V



Rated temperature

75°C / 80°C



Fire Performances

Horizontal flame



AWG

30AWG-4/0AWG



Conductor

Solid/ Stranded



Insulation

UL Labeled



Assembly

2 or more insulated singles twisted together.



Covering / Jacket

Optional / FRPE


FRPE



Bend Radius

10X

Marking Example:
 E209277 cUL AWM STYLE 21115 80°C 1000V FT2 □□AWG
 3A AWM IA 80°C 1000V □□AWG FT2 3A LF

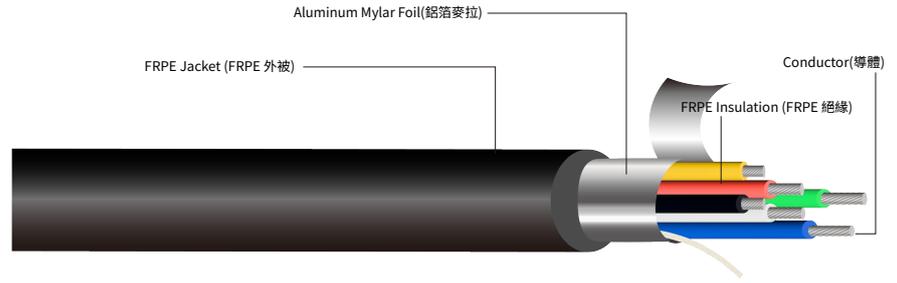

AWG 線規	Conductor		Insulation			OVERALL DIAMETER 完成外徑(mm)
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		
24	11/0.16	5	1.25	0.40	0.64	6.00±0.1
26	7/0.16	5	1.13	0.40	0.64	5.50±0.1
28	7/0.127	5	1.03	0.40	0.64	5.20±0.1
30	7/0.10	5	0.94	0.40	0.64	4.90±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
 Other logos, product and/or Company names may be trademarks of their respective owners