



UL 21339

Product Description

 **Rated voltage**
300V

 **Rated temperature**
80°C

 **Fire Performances**
Cable flame

 **AWG**
Not Specified

 **Conductor**
Solid / Stranded


 **Insulation**
UL Labeled

 **Assembly**
**2-more conductors (twisted singles
/ groups /laid parallel to form flat,
oval, or round cables)**

 **Shield / Covering / Braid**
Optional

 **Jacket**
FRPE

 **Bend Radius**
10X

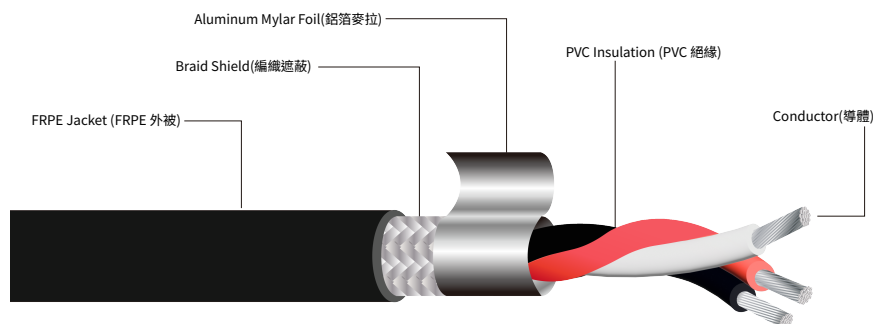

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.76	7.80±0.1
	34/0.18	2	1.84	0.76	5.60±0.1
18	34/0.18	3	1.84	0.76	7.60±0.1
	21/0.18	2	1.58	0.76	5.00±0.1
20	21/0.18	3	1.58	0.76	7.00±0.1
	17/0.16	2	1.40	0.76	4.60±0.1
22	17/0.16	3	1.40	0.76	6.50±0.1
	11/0.16	2	1.25	0.76	4.20±0.1
24	11/0.16	3	1.25	0.76	6.10±0.1
	7/0.16	2	1.13	0.76	4.00±0.1
26	7/0.16	3	1.13	0.76	5.90±0.1
	7/0.127	2	1.03	0.76	3.90±0.1
28	7/0.127	3	1.03	0.76	5.70±0.1
	7/0.10	2	0.94	0.76	3.60±0.1
30	7/0.10	3	0.94	0.76	5.50±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 21339 80°C 300V VW-1 □□AWG
3A AWM IA 80°C 300V □□AWG VW-1 3A LF

