



UL 21425

Product Description

Rated voltage

30V



Rated temperature

80°C



Fire Performances

Horizontal flame



AWG

Not Specified



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

2-4 insulated singles, twisted pairs or members of conductor assembly may be laid parallel to form an oval or flat cable.



Shield

Optional




Jacket

FRPE



Bend Radius

10X

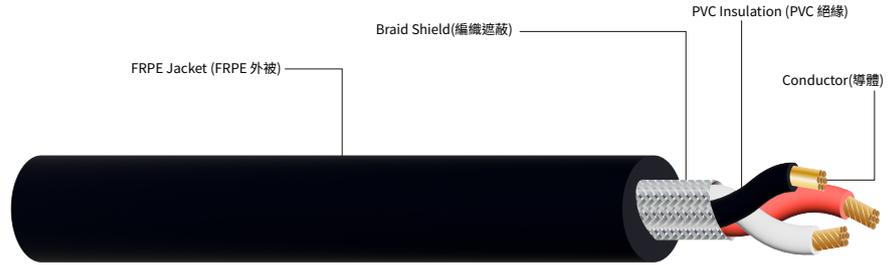

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
24	11/0.16	2	1.25	0.35	3.16±0.1
26	7/0.16	2	1.13	0.35	2.92±0.1
28	7/0.127	2	1.03	0.35	2.72±0.1
	7/0.127	8F	0.36	0.25	1.22x6.44±0.1
30	7/0.10	2	0.94	0.35	2.55±0.1
32	7/0.08	2	0.86	0.35	2.43±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 21425 80°C 30V FT2 □□AWG
3A AWM 1A 80°C 30V □□AWG FT2 3A LF

