



UL 21550

Product Description

Rated voltage

30V



Rated temperature

80°C



Fire Performances

Horizontal flame



AWG

Not Specified



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

2 or more insulated conductors



Shield / Covering

Optional



Jacket

FRPE




Bend Radius

10X

Marking Example:

E209277 cUL AWM STYLE 21550 80°C 30V FT2 □□AWG
3A AWM IA 80°C 30V □□AWG FT2 3A LF

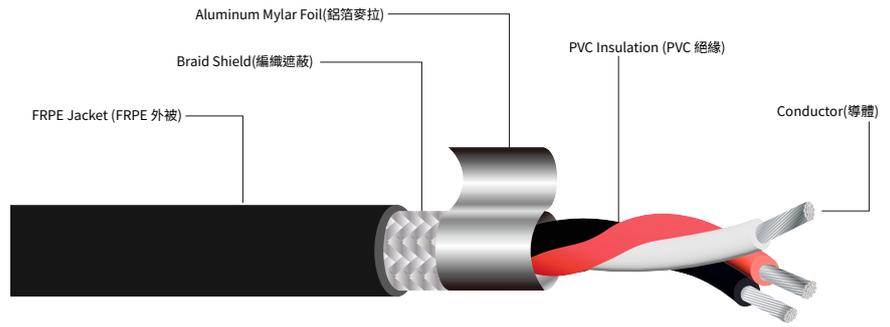

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	2	1.84	0.40	3.80±0.1
	34/0.18	3	1.84	0.40	4.50±0.1
20	21/0.18	2	1.58	0.40	3.40±0.1
	21/0.18	3	1.58	0.40	4.00±0.1
22	17/0.16	2	1.40	0.40	3.10±0.1
	17/0.16	3	1.40	0.40	3.60±0.1
24	11/0.16	2	1.25	0.40	2.90±0.1
	11/0.16	3	1.25	0.40	3.30±0.1
26	7/0.16	2	1.13	0.40	2.70±0.1
	7/0.16	3	1.13	0.40	3.10±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

