



# UL 21551

## Product Description

 **Rated voltage**  
**30V**

 **Rated temperature**  
**80°C**

 **Fire Performances**  
**Cable flame**

 **AWG**  
**Not Specified**

 **Conductor**  
**Solid / Stranded**

 **Insulation**  
**UL Labeled**


 **Assembly**  
**Fillers are optional**

 **Shield / Covering**  
**Optional**

 **Jacket**  
**FRPE**

 **Bend Radius**  
**10X**

**Marking Example:**  
E209277 cUL AWM STYLE 21551 80°C 30V VW-1 □□AWG  
3A AWM IA 80°C 30V □□AWG VW-1 3A LF

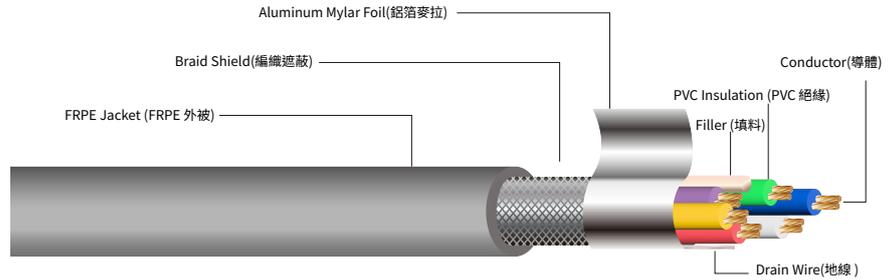

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	2	1.84	0.51	4.10±0.1
	34/0.18	3	1.84	0.51	4.50±0.1
20	21/0.18	2	1.58	0.51	3.60±0.1
	21/0.18	3	1.58	0.51	4.20±0.1
22	17/0.16	2	1.40	0.51	3.30±0.1
	17/0.16	3	1.40	0.51	3.80±0.1
24	11/0.16	2	1.25	0.51	3.10±0.1
	11/0.16	3	1.25	0.51	3.50±0.1
26	7/0.16	2	1.13	0.51	2.90±0.1
	7/0.16	3	1.13	0.51	3.30±0.1

### AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners

