



UL 2785

Product Description

 Rated voltage

300V



Rated temperature

60°C



Fire Performances

Horizontal flame



AWG

UL Labeled



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

2-more



Shield / Covering

Optional



Jacket


PVC



Bend Radius

10X

Marking Example:
 E209277 cUL AWM STYLE 2785 80°C 300V FT2 □□AWG
 3A AWM IA 80°C 300V □□AWG FT2 3A LF

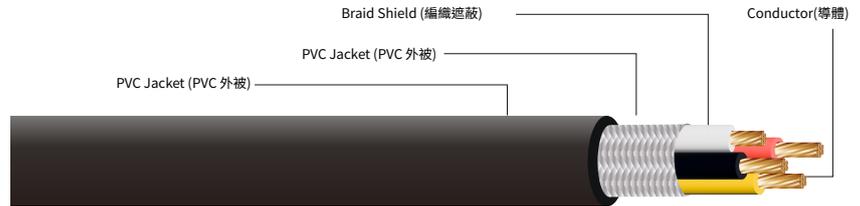

AWG 線規	Conductor		Insulation			OVERALL DIAMETER 完成外徑(mm)
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		
28	7/0.127	3	1.03	0.15	0.38	3.11±0.10
	7/0.127	4	1.03	0.15	0.38	3.46±0.10
	7/0.127	6	1.03	0.15	0.38	4.00±0.10
	7/0.127	8	1.03	0.15	0.38	4.50±0.10
	7/0.127	10	1.03	0.15	0.38	4.83±0.10
30	7/0.10	3	0.94	0.15	0.38	2.95±0.10
	7/0.10	4	0.94	0.15	0.38	3.24±0.10
	7/0.10	6	0.94	0.15	0.38	3.71±0.10
	7/0.10	8	0.94	0.15	0.38	4.13±0.10
	7/0.10	10	0.94	0.15	0.38	4.50±0.10

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
 Other logos, product and/or Company names may be trademarks of their respective owners