



UL 2919

Product Description

Rated voltage

30V



Rated temperature

80°C



Fire Performances

Cable flame



AWG

40AWG min



Conductor

UL Labeled



Insulation

UL Labeled



Assembly

2-more condutors(twisted pairs / groups /laid parallel to form flat, oval, or round cables)



Shield

Optional




Jacket

PVC



Bend Radius

10X

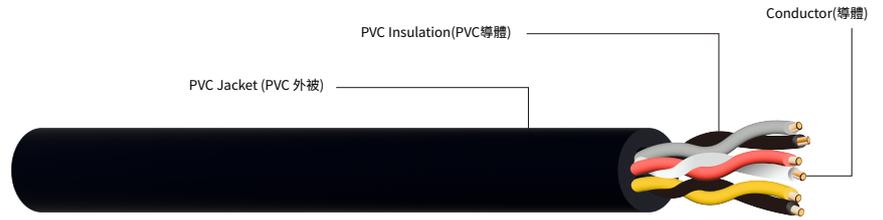

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2P	2.13	0.76	7.03±0.10
18	34/0.18	2P	1.85	0.76	6.31±0.10
20	21/0.18	2P	1.59	0.76	5.80±0.10
22	17/0.16	2P	1.40	0.76	5.40±0.10
24	11/0.16	2P	1.25	0.76	5.00±0.10
26	7/0.16	2P	1.13	0.76	4.71±0.10
26	7/0.16	3P	1.13	0.76	5.41±0.10
28	7/0.127	2P	1.03	0.76	4.47±0.10
28	7/0.127	2P	1.03	0.76	5.12±0.10
30	7/0.10	2P	0.94	0.76	4.28±0.10
30	7/0.10	3P	0.94	0.76	5.00±0.10

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 2919 80°C 30V VW-1 □□AWG
3A AWM IA 80°C 30V □□AWG VW-1 3A LF

