



# UL 2990

## Product Description

Rated voltage

**30V**



Rated temperature

**80°C**



Fire Performances

**Cable flame**



AWG

**40AWG min**



Conductor

**UL Labeled**



Insulation

**UL Labeled**



Assembly

2-more condutors(twisted pairs /  
groups /laid parallel to form flat,  
oval, or round cables)



Covering / Shield

**Optional / PVC**

**Optional**




Jacket

**PVC**



Bend Radius

**10X**

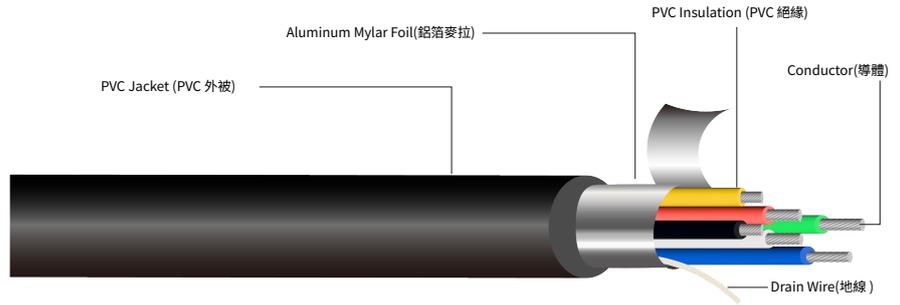

AWG 線規	Conductor		Insulation			OVERALL DIAMETER 完成外徑(mm)
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		
<b>28</b>	7/0.127	<b>2</b>	1.03	0.15	0.80	3.00±0.1
	7/0.127	<b>3</b>	1.03	0.15	0.80	3.96±0.1
	7/0.127	<b>4</b>	1.03	0.15	0.80	4.27±0.1
	7/0.127	<b>5</b>	1.03	0.15	0.80	4.55±0.1
	7/0.127	<b>6</b>	1.03	0.15	0.80	4.81±0.1
	7/0.127	<b>7</b>	1.03	0.15	0.80	5.04±0.1
	7/0.127	<b>8</b>	1.03	0.15	0.80	5.25±0.1
	7/0.127	<b>9</b>	1.03	0.15	0.80	5.46±0.1
	7/0.127	<b>10</b>	1.03	0.15	0.80	5.65±0.1
	7/0.127	<b>14</b>	1.03	0.15	0.80	6.34±0.1
	7/0.127	<b>17</b>	1.03	0.15	0.80	6.79±0.1
	7/0.127	<b>18</b>	1.03	0.15	0.80	6.93±0.1
7/0.127	<b>25</b>	1.03	0.15	0.80	7.83±0.1	
7/0.127	<b>34</b>	1.03	0.15	0.80	8.81±0.1	

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:  
E209277 cUL AWM STYLE 2990 80°C 30V VW-1 □□AWG  
3A AWM IA 80°C 30V □□AWG VW-1 3A LF

