



UL 20276

Product Description

 Rated voltage
30V

 Rated temperature
60°C / 80°C

 Fire Performances
Horizontal flame / Cable flame

 AWG
40AWG min

 ²⁹CU Conductor
Solid/ Stranded


 Insulation
UL Labeled

 Assembly
2-more conductors(twisted pairs / groups /laid parallel to form flat, oval, or round cables)

 Covering / Shield
**Optional / PVC
Optional**

 Jacket
PVC

 Bend Radius
10X

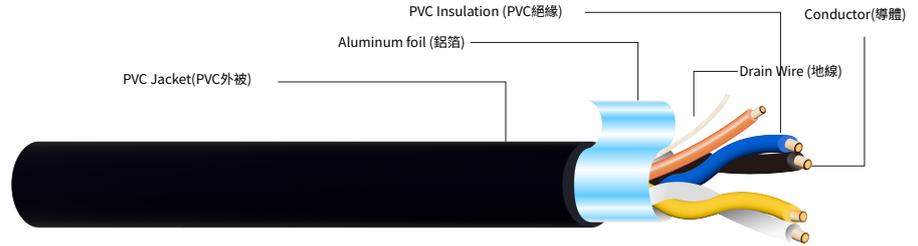

Conductor			Insulation		
Cores (N) 芯線	AWG 線規	Stranded (No./mm) 線規/線徑	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
4C	22	17/0.16	1.30	0.38	5.00±0.1
2P	24	7/0.20	1.02	0.51	5.50±0.1
2C	24	11/0.16	1.02	0.51	
3P	24	40/0.08	1.00	0.38	5.80±0.1
1C	24	7/0.20	1.02	0.38	

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 20276 80°C 30 V VW-1 □□AWG
3A AWM IA 80°C 30 V □□AWG VW-1 3A LF

