



UL 20734

Product Description



Rated voltage

600V

Rated temperature

105°C

Fire Performances

Horizontal flame

AWG

Not apesified

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2-3 insulated singles or cables**laid parallel / 2-more condu-****tors(twisted pairs / groups)**

Covering


PVC

Bend Radius

10X**Marking Example:**

E209277 cUL AWM STYLE 20734 105°C 600V FT2 □□AWG

3A AWM IA 105°C 600V □□AWG FT2 3A LF

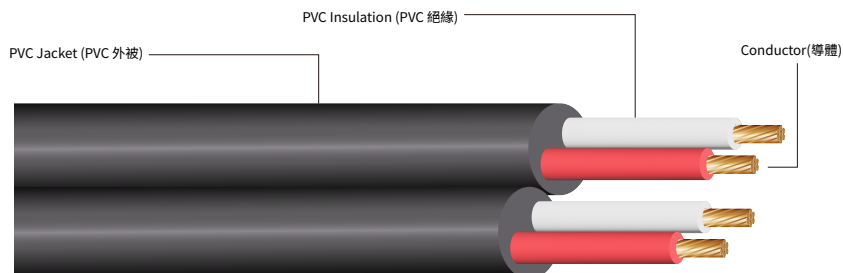

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
10	105/0.254	3.01	2F	0.23	6.0x9.0±0.10
12	65/0.254	2.37	2F	0.23	5.0x7.5±0.10
14	41/0.254	1.88	2F	0.23	4.2x6.2±0.10
16	26/0.254	1.50	2F	0.23	3.5x5.3±0.10
18	34/0.18	1.21	2F	0.23	3.1x4.7±0.10
20	21/0.18	0.95	2F	0.23	2.6x4.0±0.10
22	17/0.16	0.76	2F	0.23	2.3x3.5±0.10
24	11/0.16	0.62	2F	0.23	2.4x3.6±0.10
26	7/0.16	0.49	2F	0.23	1.9x2.8±0.10
28	7/0.127	0.39	2F	0.23	1.7x2.6±0.10
30	7/0.10	0.31	2F	0.23	1.55x2.4±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners