



UL 20893

Product Description

Rated voltage

600V

Rated temperature

105°C

Fire Performances

Horizontal flame

AWG

30AWG-10AWG

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2-200 insulated singles twisted pair triads
or quads laid parallel in one plane


Covering

PVC

Bend Radius

10X

Marking Example:
E209277 cUL AWM STYLE 20893 105°C 600V FT2 □□ AWG
3A AWM IA 105°C 600V □□ AWG FT2 3A LF

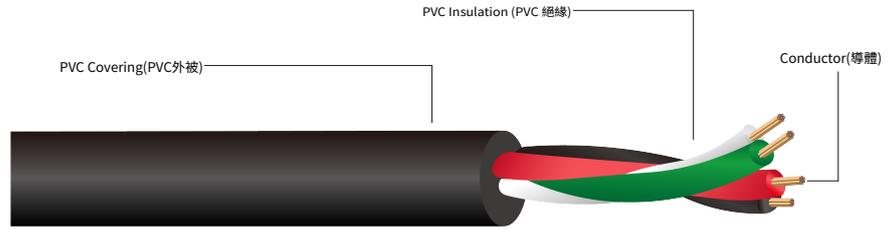

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
10	105/0.254	2	3.64	0.20	7.69±0.1
12	65/0.254	2	3.00	0.20	6.40±0.1
14	41/0.254	2	2.52	0.20	5.43±0.1
16	26/0.254	2	2.13	0.20	4.67±0.1
18	34/0.18	2	1.85	0.20	4.10±0.1
20	21/0.18	2	1.59	0.20	3.58±0.1
22	17/0.16	2	1.40	0.20	3.20±0.1
24	11/0.16	2	1.25	0.20	2.90±0.1
26	7/0.16	2	1.13	0.20	2.65±0.1
28	7/0.127	2	1.03	0.20	2.45±0.1
30	7/0.10	2	0.94	0.20	2.29±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners