



UL 21222

Product Description

 **Rated voltage**
300V

 **Rated temperature**
105°C

 **Fire Performances**
Cable flame

 **AWG**

40AWG min

 **Conductor**

Solid / Stranded

 **Insulation**

UL Labeled

 **Assembly**

2-more conductors (laid parallel or twisted forming a flat, oval or round cable)

 **Covering / Shield**


Optional / PVC
Optional

 **Jaket**

PVC

 **Bend Radius**

10X

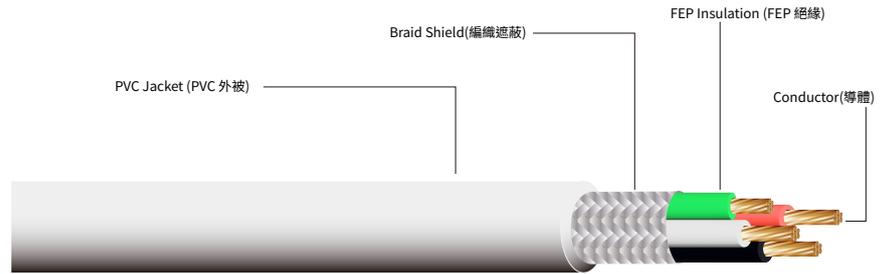

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
20	100/0.08	4	1.45	0.76	4.90±0.1
26	30/0.08	8P	0.90	0.76	6.70±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 21222 105°C 300V VW-1 □□AWG
3A AWM IA 105°C 300V □□AWG VW-1 3A LF

