



# UL 22080

## Product Description

 Rated voltage  
**600V**

 Rated temperature  
**105°C**

 Fire Performances  
**Cable flame**

 AWG  
**Not Specified**

 Conductor  
**Solid / Stranded**


 Insulation  
**UL Labeled**

 Assembly  
2-more conductors(twisted pairs / groups /laid parallel to form flat, oval, or round cables)

 Shield / Covering  
**Optional**

 Jacket  
**PVC**

 Bend Radius  
**10X**

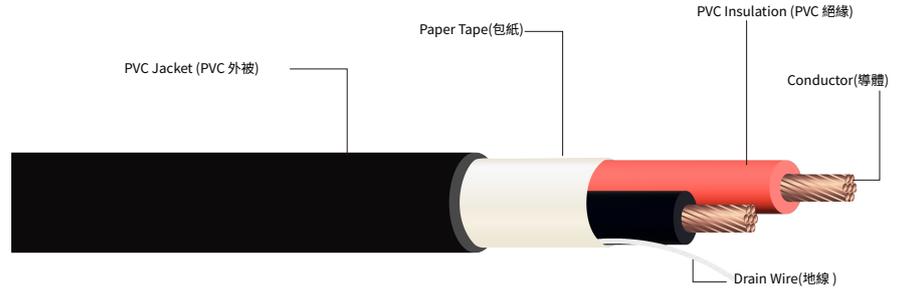

| AWG<br>線規 | Conductor                  |                    | Insulation                                  |                                     |                              |
|-----------|----------------------------|--------------------|---|-------------------------------------|------------------------------|
|           | Stranded (No./mm)<br>線規/線徑 | Cores (N)<br>芯線(C) | Insulation overall Diameter(mm)<br>芯線直徑(mm) | Jacket of Thickness(mm)<br>外被厚度(mm) | OVERALL DIAMETER<br>完成外徑(mm) |
| <b>14</b> | 41/0.254                   | 2                  | 2.50  | 0.80                                | 6.48±0.1                     |
| <b>16</b> | 26/0.254                   | 2                  | 2.12  | 0.80                                | 5.90±0.1                     |
| <b>18</b> | 16/0.254                   | 2                  | 1.80  | 0.80                                | 5.40±0.1                     |
| <b>20</b> | 21/0.18                    | 2                  | 1.57  | 0.80                                | 5.00±0.1                     |
| <b>22</b> | 7/0.254                    | 2                  | 1.40  | 0.80                                | 4.70±0.1                     |
| <b>24</b> | 11/0.16                    | 2                  | 1.23  | 0.80                                | 4.41±0.1                     |
| <b>26</b> | 7/0.16                     | 2                  | 1.11  | 0.80                                | 4.21±0.1                     |

### AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners

**Marking Example:**  
E209277 cUL AWM STYLE 22080 105°C 600V VW-1 □□AWG  
3A AWM IA 105°C 600V □□AWG VW-1 3A LF

