



UL 1617

Product Description

 **Rated voltage**
600V

 **Rated temperature**
105°C

 **Fire Performances**
Horizontal flame

 **AWG**
UL Labeled


 **Conductor**
UL Labeled

 **Insulation**
UL Labeled

 **Covering**
PVC

 **Bend Radius**
10X

Marking Example:
E209277 cUL AWM STYLE 1617 105°C 600V FT2 □□AWG
3A AWM IA 105°C 600V □□AWG FT2 3A LF

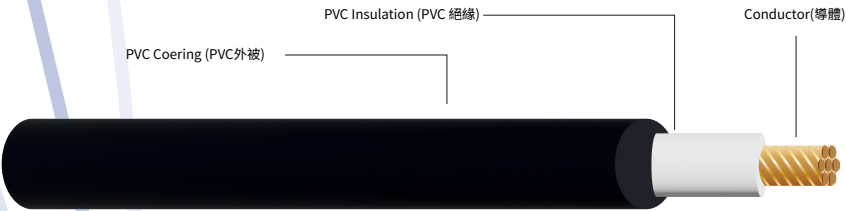

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Covering (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
16	26/0.254	0.40	0.50	3.30±0.15
18	34/0.18	0.40	0.50	3.01±0.15
20	21/0.18	0.40	0.50	2.75±0.15
22	17/0.16	0.40	0.50	2.56±0.15
24	11/0.16	0.40	0.50	2.41±0.15
26	7/0.16	0.40	0.50	2.29±0.15

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners