



## 300V PVC Wire

## UL 1777

## Product Description

 Rated voltage  
**300V**

 Rated temperature  
**80°C**

 Fire Performances  
**FT2 flame**

 AWG

**30AWG-16AWG**

 Conductor

**Solid / Stranded**

 Insulation  
**SRPVC**

 Shield

**Optional**


 Jacket

**PVC**

 Bend Radius

**10X**

**Marking Example:**  
E209277 cUL AWM STYLE 1777 80°C 300V FT2 □□AWG  
3A AWM IA 80°C 300V □□AWG FT2 3A LF

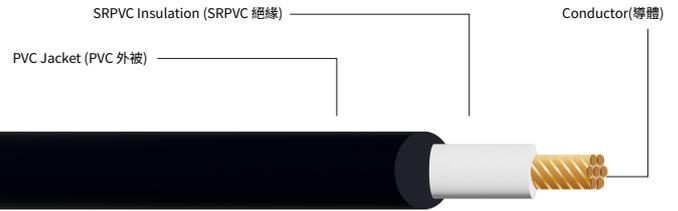

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Covering (mm) 外被厚度(mm)	
<b>16</b>	26/0.254	0.29	0.82	3.72±0.10
<b>18</b>	34/0.18	0.29	0.82	3.43±0.10
<b>20</b>	21/0.18	0.29	0.82	3.17±0.10
<b>22</b>	17/0.16	0.29	0.82	2.98±0.10
<b>24</b>	11/0.16	0.29	0.82	2.83±0.10
<b>26</b>	7/0.16	0.29	0.82	2.71±0.10
<b>28</b>	7/0.127	0.29	0.82	2.61±0.10
<b>30</b>	7/0.10	0.29	0.82	2.53±0.10

**AWM UL 758**

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners