



UL 1673

Product Description

 Rated voltage
600V

 Rated temperature
105°C

 Fire Performances
Horizontal flame

 AWG
UL Labeled


 ²⁹CU
Conductor
Solid / Stranded

 Insulation
UL Labeled

 covering
PVC / XLPVC

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1673 105°C 600V FT2 □□AWG
3A AWM IA 105°C 600V □□AWG FT2 3A LF

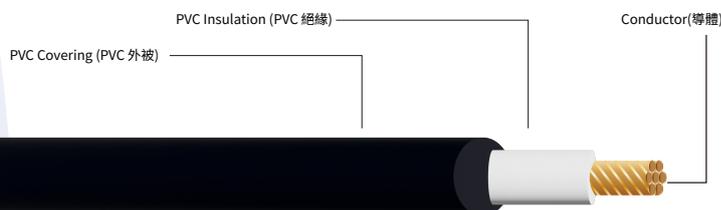

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Covering (mm) 外被厚度(mm)	
16	26/0.254	0.55	0.19	2.97±0.10
18	34/0.18	0.55	0.19	2.68±0.10
20	21/0.18	0.55	0.19	2.42±0.10
22	17/0.16	0.55	0.19	2.23±0.10
24	11/0.16	0.55	0.19	2.08±0.10
26	7/0.16	0.55	0.19	1.96±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners