



UL 2651

Product Description

Rated voltage

300V



Rated temperature

105°C



Fire Performances

Horizontal flame



AWG

36AWG-14AWG



Conductor

Solid/ Stranded



Insulation

PVC



Assembly

2- 150



Shield / Covering

Optional / PVC



Bend Radius


10X

Marking Example:

E209277 cUL AWM STYLE 2651 105°C 300 V FT2 □□AWG
 3A AWM IA 105°C 300 V □□AWG FT2 3A LF



PVC Insulation(PVC導體)

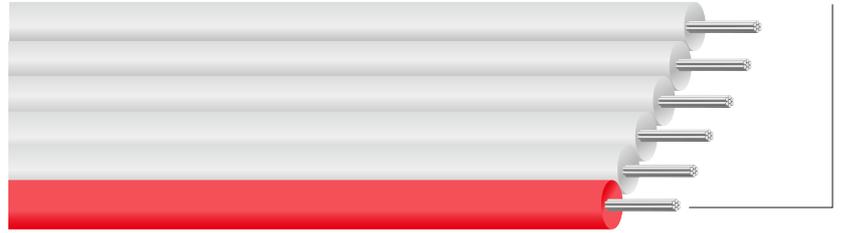

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
22	17/0.16	0.76	2F	0.29	1.4x2.8±0.1
24	11/0.16	0.62	2F	0.29	1.2x2.4±0.1
26	7/0.16	0.49	2F	0.29	1.1x2.2±0.1
28	7/0.127	0.39	2F	0.29	1.0x2.0±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners