



# UL 20251

## Product Description

 Rated voltage

**150V**



Rated temperature

**60°C**



Fire Performances

**Horizontal flame**



AWG

**32 AWG - 18 AWG**



Conductor

**Solid / Stranded**



Insulation

**PP**



Assembly

2-10 insulated conductors; cable straight or retractile; core flat or round; barrier layer and/or fillers optional



Shield

**Optional**



Jacket


**PVC**



Bend Radius

**10X**

Marking Example:  
E209277 cUL AWM STYLE 20251 60°C 150V VW-1 □□AWG  
3A AWM IA 60°C 150V □□AWG VW-1 3A LF

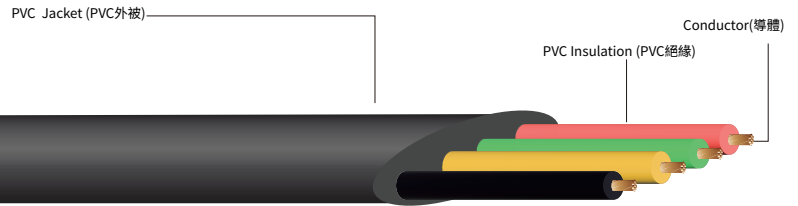

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
22	17/0.16	3	1.15	0.76	2.5*6.6mm
	17/0.16	3	1.15	0.76	2.5*4.9mm
26	7/0.16	4	0.95	0.80	2.5*7.8mm
	7/0.16	6	0.95	0.80	2.5*7.8mm

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners

