



UL 21266

Product Description

Rated voltage

600V

Rated temperature

80°C

Fire Performances

Cable flame

AWG

Not Specified

Conductor

Solid/ Stranded

Insulation

UL Labeled

Assembly

**2 or more individual insulated
wire / cabled together**

Shield

Optional


Jacket

FRPE

Bend Radius

10X

Marking Example:
E209277 cUL AWM STYLE 21266 80°C 600V VW-1 □□AWG
3A AWM IA 80°C 600V □□AWG VW-1 3A LF

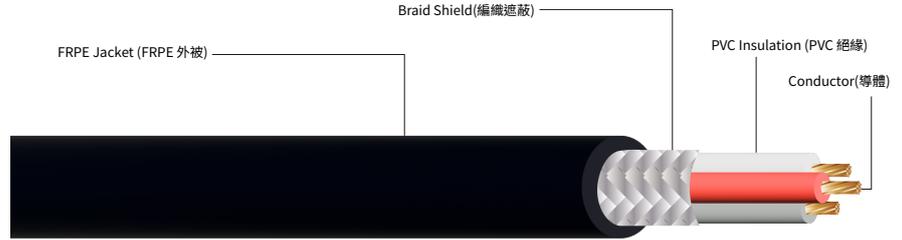

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.76	4.97±0.1
	34/0.18	2	1.84	0.76	4.60±0.1
18	34/0.18	3	1.84	0.76	5.20±0.1
	21/0.18	2	1.58	0.76	4.10±0.1
20	21/0.18	3	1.58	0.76	4.70±0.1
	17/0.16	2	1.40	0.76	3.90±0.1
22	17/0.16	3	1.40	0.76	4.40±0.1
	11/0.16	2	1.25	0.76	3.60±0.1
24	11/0.16	3	1.25	0.76	4.10±0.1
	7/0.16	2	1.13	0.76	3.40±0.1
26	7/0.16	3	1.13	0.76	3.80±0.1
	7/0.127	2	1.03	0.76	3.20±0.1
28	7/0.127	3	1.03	0.76	3.60±0.1
	7/0.10	2	0.94	0.76	3.10±0.1
30	7/0.10	3	0.94	0.76	3.50±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners



<https://www.3awire.com/>

All Rights Reserved.

The information provided by 3A PLUS is intended for general informational purposes only and should not be construed as professional advice. While we strive for accuracy and completeness, we make no guarantees regarding the reliability, suitability, or availability of the information presented. Any reliance you place on such information is strictly at your own risk. We reserve the right to modify our products, services, and policies at any time without prior notice. For specific inquiries or concerns, please contact us directly. Thank you for choosing 3A PLUS Wire & Cable.