



UL 21350

Product Description

Rated voltage

30V



Rated temperature

60°C



Fire Performances

Cable flame



AWG

30AWG-4/0AWG



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

2 or more insulated singles twisted together



Covering / Shield

Optional

Optional / FRPE




Jacket

FRPE



Bend Radius

10X

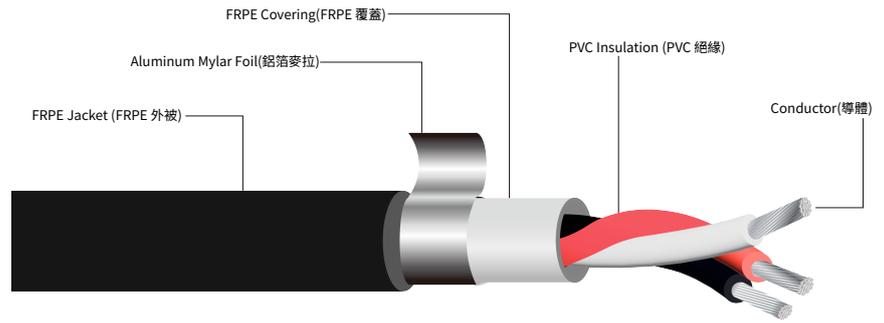

AWG 線規	Conductor		Insulation		
	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.76	7.80±0.1
	34/0.18	2	1.84	0.76	5.60±0.1
18	34/0.18	3	1.84	0.76	7.60±0.1
	21/0.18	2	1.58	0.76	5.00±0.1
20	21/0.18	3	1.58	0.76	7.00±0.1
	17/0.16	2	1.40	0.76	4.60±0.1
22	17/0.16	3	1.40	0.76	6.50±0.1
	11/0.16	2	1.25	0.76	4.20±0.1
24	11/0.16	3	1.25	0.76	6.10±0.1
	7/0.16	2	1.13	0.76	4.00±0.1
26	7/0.16	3	1.13	0.76	5.90±0.1
	7/0.127	2	1.03	0.76	3.90±0.1
28	7/0.127	3	1.03	0.76	5.70±0.1
	7/0.10	2	0.94	0.76	3.60±0.1
30	7/0.10	3	0.94	0.76	5.50±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 21350 60°C 30V VW-1 □□AWG
3A AWM IA 60°C 30V □□AWG VW-1 3A LF

